

ISO 9001:2015
ISO 14001:2015
ISO (OHSAS) 45001:2018



JET GRANITO PVT. LTD.

Corp. Office: 84, Newyork Tower-A, Nr. Thaltej Cross Road,
Thaltej, S. G. Highway, Ahmedabad-380 054, Guj., India.

+91 79 2684 1242 sales@jetgranito.com
+91 99099 05292

Reg. Office & Factory: 8-A, National Highway, Matel Char Rasta,
Tal.: Wankaner, Dist.: Rajkot-363 621, Guj., India.

+91 99250 27300 info@jetgranito.com
www.jetgranito.com



www.wolvescreata.com

www.jetgranito.com



**SURFACES THAT
ACCENTUATE FLAIR**

parktone
HEAVY DUTY PARKING TILES

300x300mm

parktone
HEAVY DUTY PARKING TILES

300x300mm

Our parking tiles are manufactured with advanced technology that makes them tough and durable. As they have high load bearing capacity, these tiles are perfect for the areas where continuous traffic is common. To make your space enduring, our parking tiles come with abrasion and wear & tear resistance. Besides, they have anti-skid feature that provides safety to vehicles and, avoids accidents.



Refined

Get ever so closer to unmatched urban refinement




01




02



03



04




05



07



08




12



14

Rugged

Articles that will stand the test of time elegantly



18




20



22



25



26



32



33



36



37




Brawny
A cloak of magnificence for the outdoors



44



51



55-L




55-HL




55-D



66



67

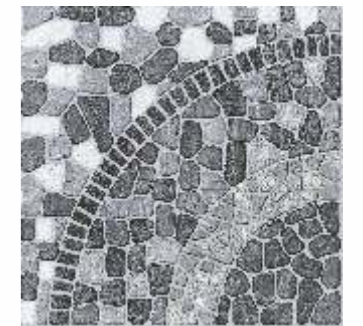

69

Eloquent

Embrace the vogue of future with these surfaces



77



80



83



86



87



88



89



91



96



Radical

Impressions that take panache to the next level




Noble

Allow your abode to become the talk of the town




97



101



102



103




104



105



106



107



108



109



110



111



112



113



114



115



119




120



Palatial


Select an awe-inspiring spectacle for the outdoors



124



127



125



126

Wicked

Reimagine outdoor décor aesthetics with these surfaces



Eminent

Get hand in glove with exquisite outdoor tiles

TECHNICAL SPECIFICATION

Sr. No.	Particulars	Standard as per ISO 13006/EN 176 Group Bla	JET VITRIFIED TILES Value	Method of Testing
01	Deviation in Length	± 0.6%	0.1%	EN 98
02	Deviation in Thickness	± 5.0%	0.1%	EN 98
03	Straightness of Side (Right angle)	± 0.5%	0.1%	EN 98
04	Rectangularity	± 0.6%	0.2%	EN 98
05	Surface Flatness	± 0.5%	0.2%	EN 98
06	Water Absorption	< 0.5%	0.5%	EN 99
07	Mohs Hardness of surface	>6.0%	8	EN 101
08	Flexural Strength	>27N/mm ²	48N/mm ²	EN 100
09	Abrasion resistance.	<204 mm ³	>143mm ³	EN 102
10	Skid resistance(Friction co-efficient)	>0.4	>0.6	ASTMC – 1028
11	Breaking Strength	1113N	2880N	ASTMC - 648
12	density (g/cc)	>2	2.4	DIN 51082
13	Chemical resistance	No Damage	No Damage	EN 106
14	Thermal Shock resistance	No Damage	No Damage	EN 104
15	Colour resistance	No Damage	No Damage	DIN 51094
16	Thermal expansion	< 9 x 10 ⁻⁶	<6 x10 ⁻⁶	EN 103
17	Stain resistance	Resistance	Resistance	ISO 10545 – 14
18	Moisture expansion	Nil	Nil	ISO 10545 – 10
19	Glossiness	-	Min 65% reflection	Glossmeter
20	Wedging	-	± 1.0%	-

Packing Detail

Product	Size	No. of Tiles Per Box	Coverage Area (Approx)	Weight Per Box (Approx)
Axcent Digital	300 x 300 mm	8 Pcs.	0.72 Sq. Mtr.	14.5 Kg.
Axcent Parking	300 x 300 mm	10 Pcs.	0.90 Sq. Mtr.	18 Kg.