

ISO
9001:2015

ISO
14001:2015

ISO
(OHSAS)
45001:2018

CE

CAPEXIL



www.jetgranito.com

JET
GRANITO®



JET
GRANITO®

JET GRANITO PVT. LTD.

Corp. Office: 84, Newyork Tower-A, Nr. Thaltej Cross Road,
Thaltej, S. G. Highway, Ahmedabad-380 054, Guj., India.

☎ +91 79 2684 1242 ✉ sales@jetgranito.com
☎ +91 99099 05292

Reg. Office & Factory: B-A, National Highway, Matel Char Rasta,
Tal.: Wankaner, Dist.: Morbi-363642, Guj., India.

☎ +91 99250 27300 ✉ info@jetgranito.com
🌐 www.jetgranito.com

NANO +
VITRIFIED
TILES

Vivid

Add a dash of vibrancy and charm to your décor


600x600mm

NANO + VITRIFIED TILES

600x600mm

Nano Vitrified Tiles are sheltered with nano pores and a liquid layer of silica to make them smooth and shiny. We use high-quality decorative paper to produce elegant designs that let your area sparkle. Their compact size adds to their flexibility and appeal. These tiles are scratch-proof and crack-resistant that makes your space glow for long. Nano Vitrified Tiles comes with shiny textures, a variety of designs, colors and supreme finish. Moreover, we follow international standards for keeping our products class apart.





1001



1017



1020



1022



1045



1048

Lavish

Let your decor tell its tale of style and poise effortlessly



1050




1053




1054



1061

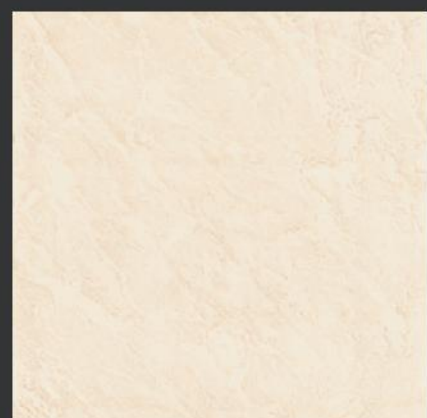

1062

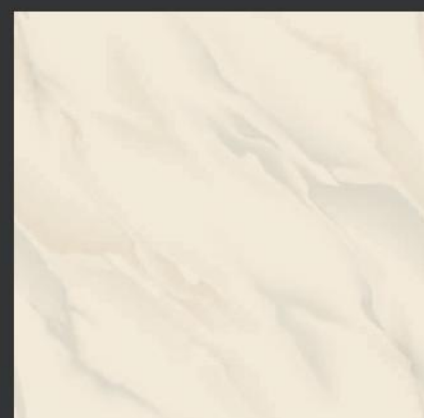

1064





1065




1068



1069



1072

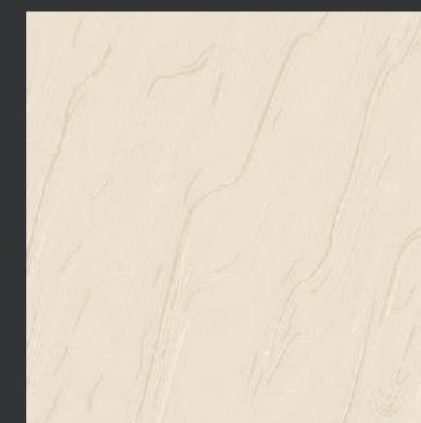

1075




1081

Majestic

Invoke the feelings of grandeur
and exclusivity in your surroundings

SST

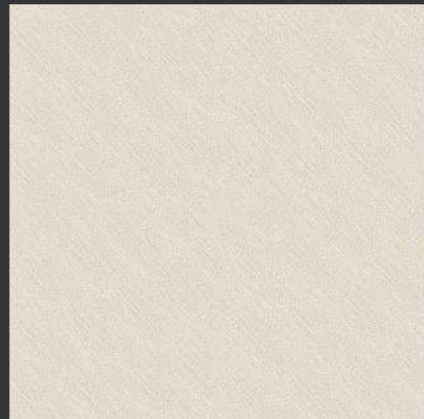

1082



1083




1084







Armenis

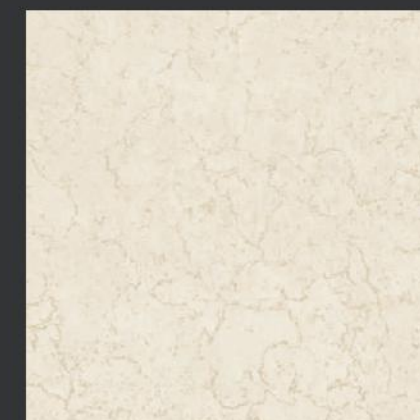


Botticino

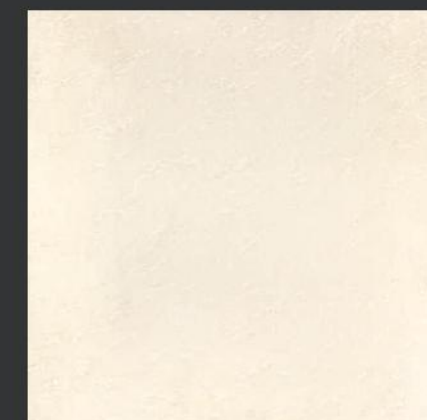


Crema Capri

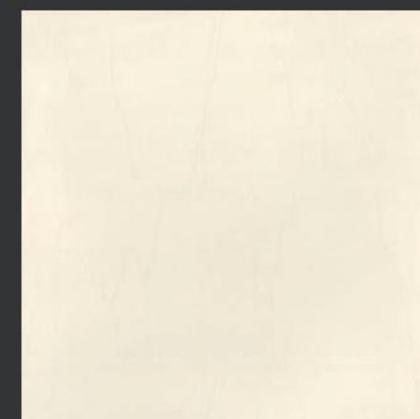

Crema Marfil

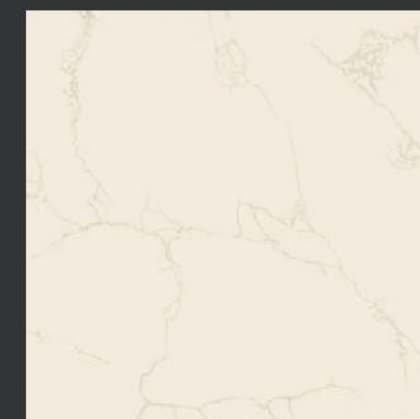

Embassy

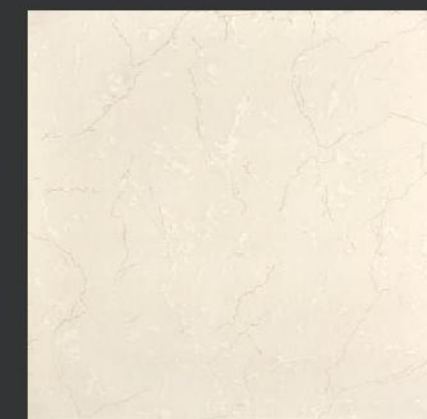

Perle



Luna




Orion Wooden



Trinity

Stately
Transform spaces into a
masterpiece of style and artistry

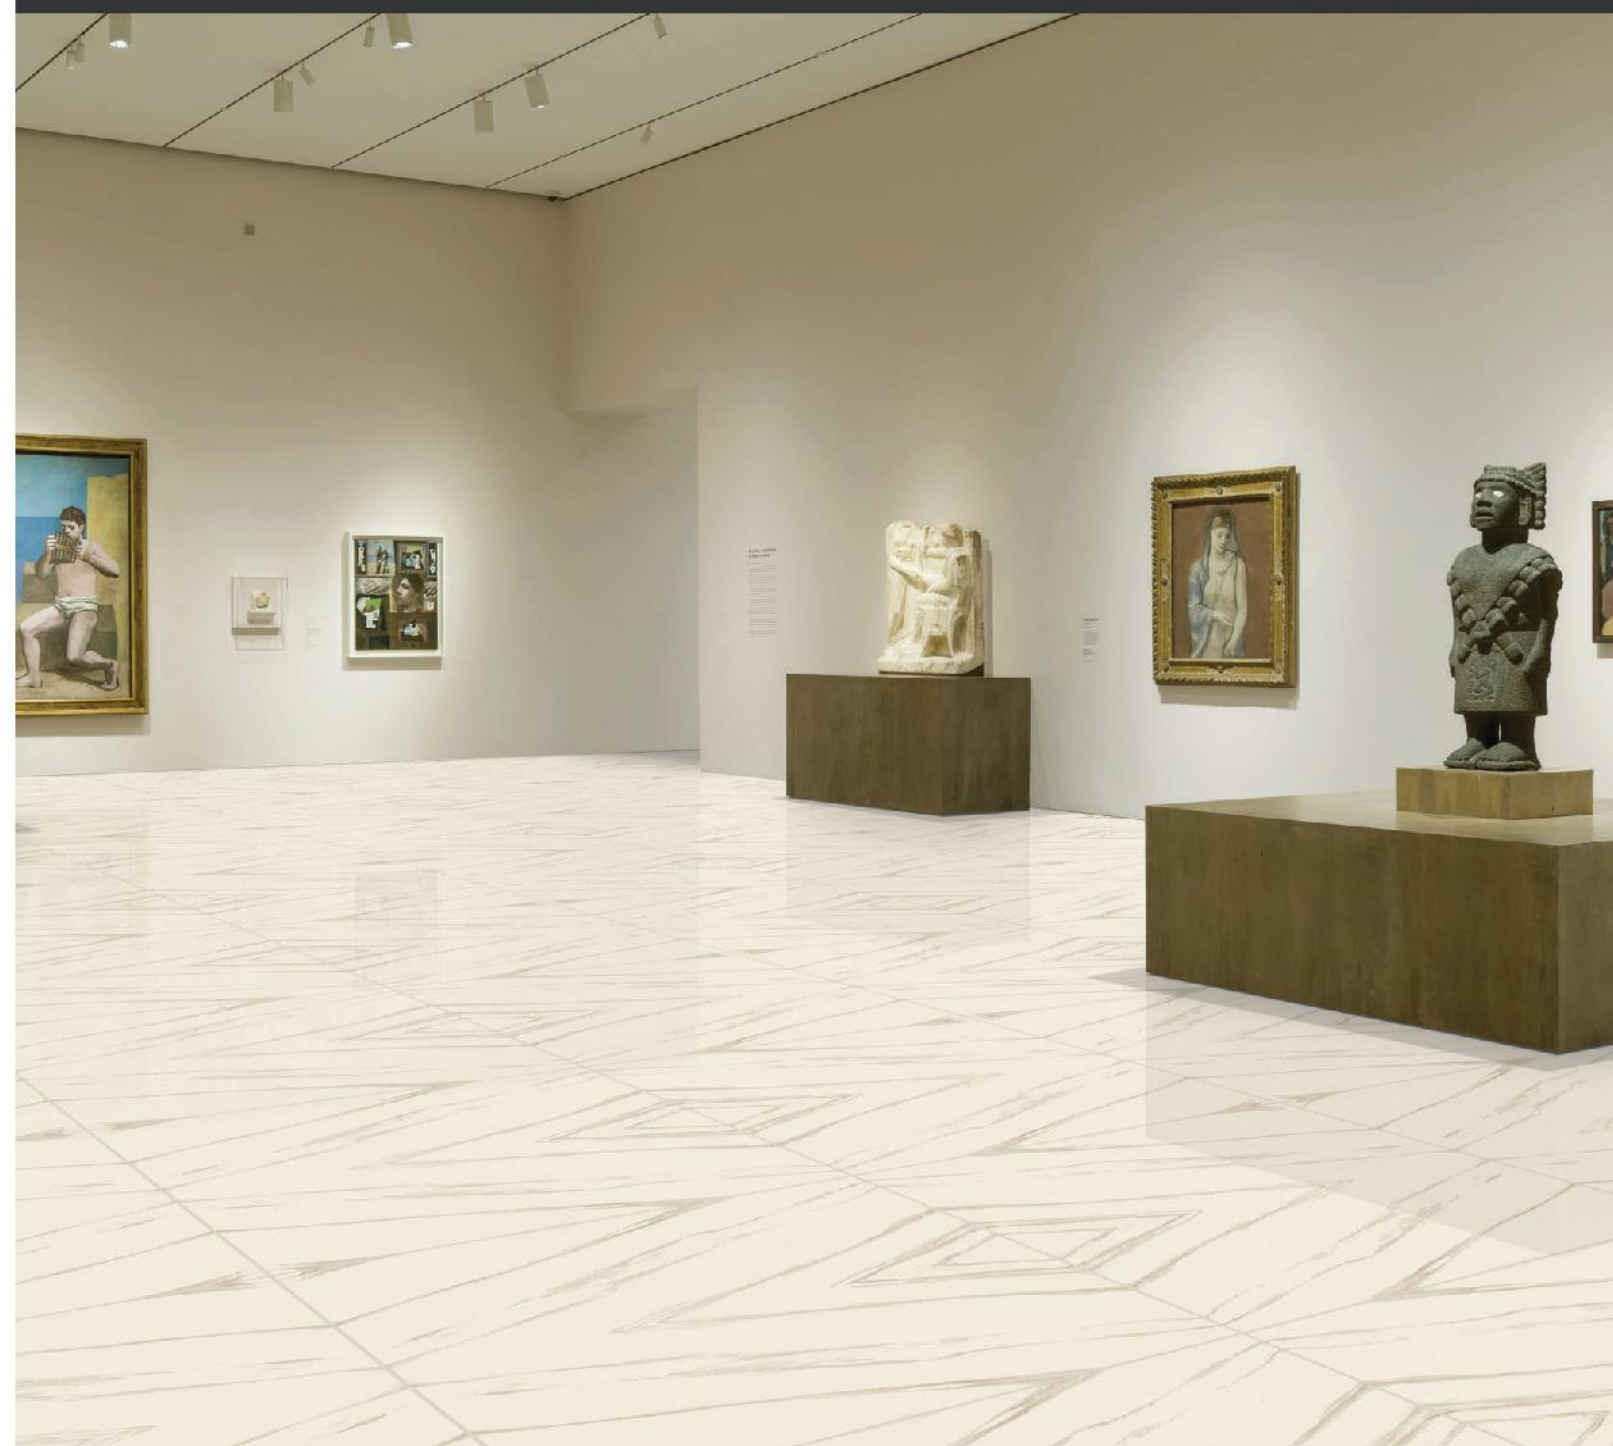

TECHNICAL SPECIFICATION

			JET VITRIFIED TILES Value	Method of Testing
1.	Deviation in Length	± 0.6%	± 0.1%	EN 98
2.	Deviation in Thickness	± 5%	± 4%	EN 98
3.	Straightness of Sides	± 0.5%	± 0.1%	EN 98
4.	Rectangularity	± 0.6%	± 0.2%	EN 98
5.	Surface Flatness	± 0.5%	± 0.3%	EN 98
6.	Water Absorption *	< 0.5%	± 0.05%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	> 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Resistance	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	–	Min. 65% - 70% reflection	Glossmeter

Packing Detail

Size	No. of Tiles/Box	Coverage Area
600x600mm	4 pcs.	1.44 sq.mt. / 15.5 sq.ft.

Lustrous

Embellish your abode with magnificent and glorious articles
of modern vogue